

9900/F9900 Series Grade 1 Concealed V/R (CVR) Exit Device

ANSI GRADE 1 ANSI/BHMA A156.3-2014 Type 7 & 8

Exceeds 500,000 Cycles

UL Listed for "A" Label Doors Rated Up to 3 Hours UL10C Positive Pressure Rated Conforms to UBC 7-2 (1997) LISTED UL305 Listed for Panic Hardware **UL10B Neutral Pressure Rated**

Comply with ANSI117.1 for Accessible and Usable Buildings and Facilities Standards



SPECIFICATIONS

CERTIFICATIONS

- ANSI Grade 1 approved, exceeds 500,000 cycles.
- · UL Listed for up to 3hrs on "A" label Fire Doors.
- · Comply with ANSI117.1 for accessible and usable Buildings and Facilities Standards.

DOOR FITTING

• 1-3/4"~ 2" thick standard.

DOOR WIDTH

- 36", rail can be cut from the end to fit door size down to 30".
- 48", rail can be cut from the end to fit door size down to 40".

MOUNTING HEIGHT

· 39-3/16" from CL of Mortise Latch case to finished floor.

STRUCTURE

- Head Cover Plated Zinc Alloy.
- Chassis Steel or Stainless Steel.
- End Cap Plated Zinc Alloy.
- Rail Assembly Heavy Gauge Extruded Aluminum.

LATCH BOLT

- · Top Latch: 3/4" throw.
- · Bottom Latch: 1/2" throw.

STRIKE

· Stainless Steel, Stainless Steel Top: 9572C, Bottom: 9575.

FASTENERS

- 9900 Furnished with wood & machine Screws.
- F9900 Furnished with wood & machine Screws and extra Sex nuts and bolts (SNB).

FINISH

- US32D (630) with anodized US26D aluminum body.
- · US10B (613) Oil Rubbed Bronze.
- · Special order for US26 (625) Polish Chrome.

HANDING

· Reversible non-handed.


DOGGING

· Standard for 9900. Cylinder Dogging Kit 9CD36/9CD48 available.

Alarm Kit 9AK36/9AK48 available.

DIMENSIONS

Projection: 3-17/64" maximum, 2-17/32" dogged. Overall Size: 8-5/64" Height x Width 33-5/32" or 45-5/32".

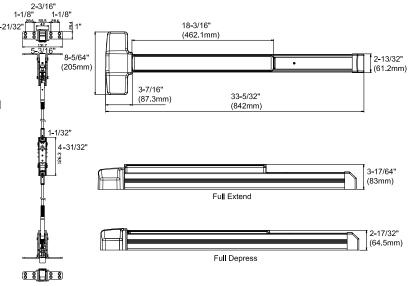


Outside Trim, Strikes & Fillers, and Accessories for 9900




25-Year Warranty

OUTSIDE TRIMS

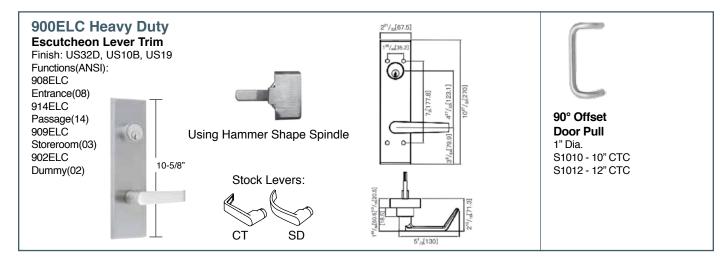

STRIKES & FILLERS

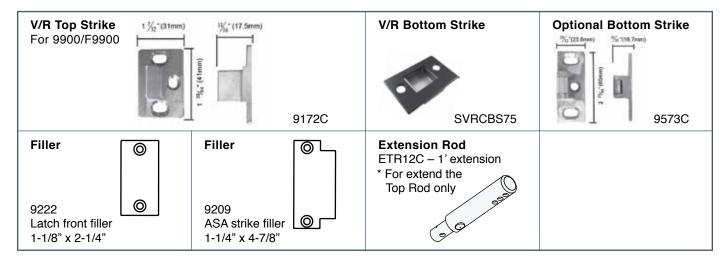

ACCESSORIES

