



Philadelphia Hardware Group, Inc.

6590 Top Gun Street
San Diego, CA 92121
www.philihardware.com

Tel
858.642.0450
858.545.2309
Fax
858.642.0454

Curve Shower Rod with Adjustable Rod

Fits Standard or Oval Bath Tub
Fits Standard Shower Curtain
Eliminates Elbow-Cling



Curve Shower Rod
US26

SPECIFICATIONS

Rod

- Bright or Satin S.S. Tube.
- 1" Diameter, 45~72" Adjustable Tube.
- Rod projection: around 5-1/8"
- Withstand up to 50Lbs with proper installation.

Bracket and Flange

- Durable Zinc Die-Cast Swivel Brackets
- Durable Zinc Die-Cast Flanges.
- 4 x Wood Screws, L: 1-3/8"
- 4x Plug anchors




Adjustable Flange

ITEMS

- 4'~6' adjustable Chrome
- 4'~6' adjustable Satin Nickel


BATH FITTING

Measure 72 in. from the floor to the place you will install the curved rod.
A second person may be required to assist you.

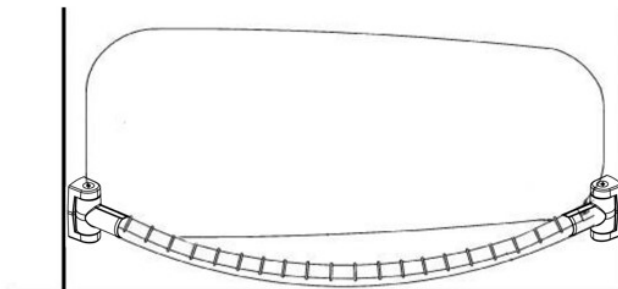

For 60" or 72" Rectangular/Standard Tub

Mount the rod approximately 3" inside the point that a straight rod is mounted. The shower rod should extend past the edge of the tub. (Please see above picture)

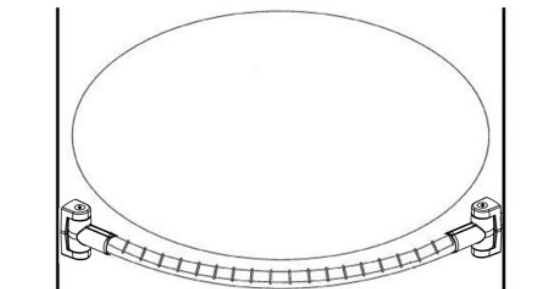

For 60" or 72" Oval Tub

Mount the rod between 6"-8" from the center of the tub. The curve of the rod should follow the edge of the tub. (Please see above picture)

SAN DIEGO

CHICAGO

ATLANTA

DALLAS