

Philadelphia Hardware Group, Inc.

6590 Top Gun Street San Diego, CA 92121 www.philihardware.com

> 858.642.0450 858.545.2309 Fax 858.642.0454

500T Series

GRADE 3 JURAN

SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: Edge Bore: 1" Latch Face: 1" x 2-1/4"		
Backset	Fits both 2-3/8" and 2-3/4".		
Door Fitting	1-3/8" ~ 1-3/4" door thick. Special order for 2" door thick.	501T-JU-US15A Passage	
Exposed Trim	Zinc or Stainless steel. Lever is zinc alloy.		
Keys	Key as requested (KA, KD, MCK, MK, GMK).		
Cylinder	KW1 standard, SC1 optional.		
Latch	2-3/8" and 2-3/4" adjustable Bolt: 1/2" throw. Faceplate: 1" x 2-1/4" round corner.		
Strike	Full lip 1-3/4" x 2-1/4" round corner (9103).		
Door Handing	Reversible, suitable for both right and left hand door.		
Function	500T – Entrance 501T – Passage 502T – Privacy 515T – Single Dummy		
	500TP – Entrance with Panic-proof Push Button 502TP – Privacy with Panic-proof Push Button Stock for US10B, US12P, US15 only, special order for other finishes.		

Finish	Stock Finish: US3 Polish Brass	US15 Satin Nickel	
	US10B Oil-Rubbed Bronze	US15A Pewter	
	US12P Tuscany Bronze	US26 Polish Chrome	
	Other required finish is subject to minimum	Other required finish is subject to minimum order quantity and longer delivery lead-time.	


SAN DIEGO · CHICAGO · ATLANTA



Philadelphia Hardware Group, Inc.

6590 Top Gun Street San Diego, CA 92121 www.philihardware.com Tel 858.642.0450 858.545.2309 Fax 858.642.0454

DIMENSIONS

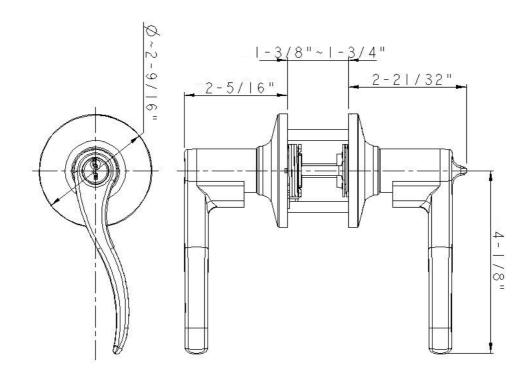

SAN DIEGO · CHICAGO · ATLANTA