

Philadelphia Hardware Group, Inc.

6590 Top Gun Street San Diego, CA 92121 www.philihardware.com

> 858.642.0450 858.545.2309 Fax 858.642.0454

500T Series

GRADE 3 ROYAL

SPECIFICATIONS


Door Prep	Cross bore: 2-1/8" Edge bore: Edge Bore: 1" Latch Face: 1" x 2-1/4"	
Backset	Fits both 2-3/8" and 2-3/4".	FOOT DV HOAD
Door Fitting	1-3/8" ~ 1-3/4" door thick. Special order for 2" door thick.	500T-RY-US12P Entrance
Exposed Trim	Zinc or Stainless steel. Lever is zinc alloy.	
Keys	Key as requested (KA, KD, MCK, MK, GMK).	
Cylinder	KW1 standard, SC1 optional.	
Latch	2-3/8" and 2-3/4" adjustable Bolt: 1/2" throw. Faceplate: 1" x 2-1/4" round corner.	
Strike	Full lip 1-3/4" x 2-1/4" round corner (9103).	
Door Handing	Reversible, suitable for both right and left hand door.	
Function	500T – Entrance 501T – Passage 502T – Privacy 515T – Single Dummy	
	500TP – Entrance with Panic-proof Push Button 502TP – Privacy with Panic-proof Push Button Stock for US10B, US12P, US15 only, special order for other finishes.	
Finish	Stock Finish: US3 Polish Brass US5 Antique Brass US10B Oil-Rubbed Brack US12P Tuscany Bronz Other required finish is subject to mi	



Philadelphia Hardware Group, Inc.

6590 Top Gun Street San Diego, CA 92121 www.philihardware.com Tel 858.642.0450 858.545.2309 Fax 858.642.0454

DIMENSIONS

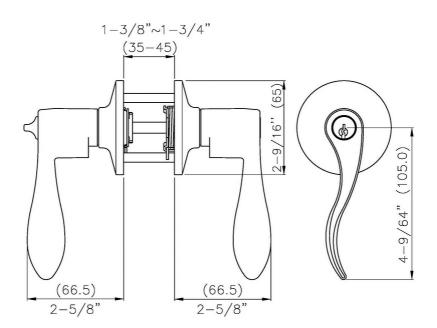

SAN DIEGO · CHICAGO · ATLANTA